

TS5

Micro DC Brushless Pump

Typical Applications

- Hot Water Circulation
- Radiant Floor Heating
- Solar Applications
- Liquid Transfer
- General Purpose Pumping

High Temp
Endurance




Specification

Model	Product Code	Max Flow Rate (L/Min)	Max Water Head (M)	Voltage (VDC)	Current (A)	Starting Voltage (VDC)	Power (W)
TS5/PV	TS5-A12-5PV	8.4	1.6	12	0.41	2	5
	TS5-A12-10PV	10	2.4	12	0.83	2	10
	TS5-A12-15PV	12.6	3.2	12	1.25	2	15

Note: High temperature 110°C (230°F)

Curve & Dimension

TS5 Performance

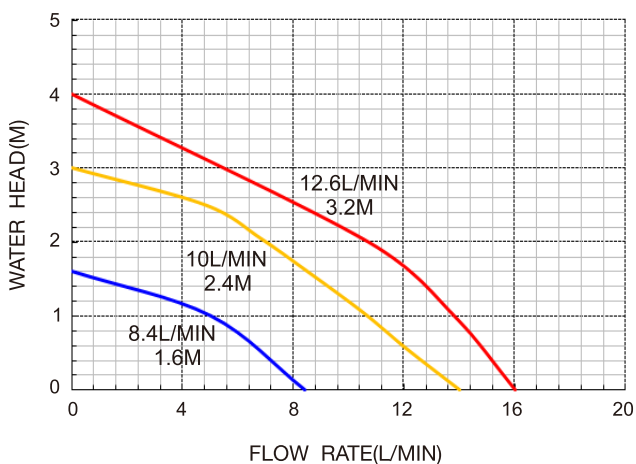

Dimension (mm)

